

MEX

คู่มือการใช้งาน
เครื่องฟอกอากาศรุ่น P201



Purifina
P201



Dear customer,

We thank you for purchasing our air purifier. Please read the user manual carefully before using the product, as this will save your time and usage of the unit easy. Please keep this manual handy for future references. If you have any other queries, please feel free to contact us.

All our efforts are dedicated towards continuous innovation and improvement of our products. In order to serve you better, we may amend the product design and/or specification without prior notice.


Table of contents

Product Overview	3
Control Panel & Operation	4
Air Quality Indication	5
Maintenance & Safety Precautions	6

Product Overview

Air purifier MEX Purifina P201 is an innovatively designed product which aims at offering a healthy and smart life to you and your family. It has multi-level filtration systems embedded in to it which detoxifies the contaminated air. This purifier is highly effective in eradicating bacteria, dust, pollutants and smoke.

Voltage	220V/50Hz
Rated Power	40W
Noise Level	$\leq 61\text{dB(A)}$
CADR	$187\text{m}^3/\text{h}$
Coverage Area	$\leq 24\text{m}^2$
Product Weight	4.5 Kg
Dimensions	238*238*412mm

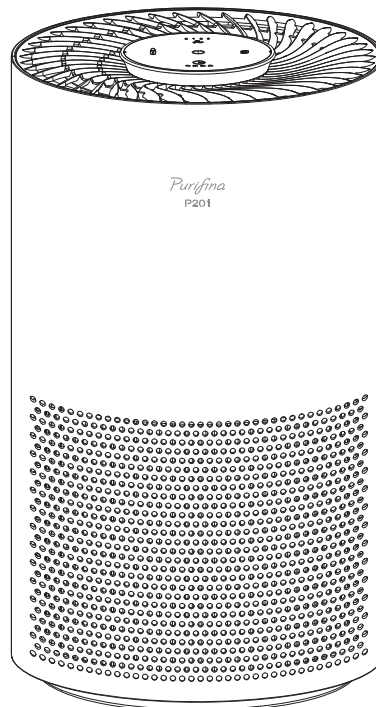

Control Panel




Icon	Description
	On/Off Button Touch the button to switch on/off the device
	Fan Speed Setting Use the button to manage the fan speed and change the mode
	Ionizer Function Touch the button to switch on/off the ionizer Turn on to enhance the ability to keep the air fresh
	Filter Reset Button When the indicator light turns on, it is the time for you to change the filter. After you have changed the filter, touch and hold the icon to reset filter changing indicator
	Timer Choose the desired timing mode (1, 2, 4, 8 hr)

Operation

Before using this product for the first time, please remove the PE bag from the filters. Please remove the lid at the bottom to open the unit. After opening the unit, take out the filters and remove the PE bag wrapped over it. After removing the PE bag. Re-install the filter and close the lid.

- 1 Power on/off  Press the power button to turn on/off the unit.
- 2 Timer Function
You can use this function to set the time. There are options for setting the time for 1, 2, 4 and 8 hours. Touch the icon once, twice, and thrice or 4 times to set the desired time period. After the selected period, the unit will turn off automatically.
- 3 Fan Speed
When the unit is turned on, the default of fan speed is **set to A(Auto)**. However, you can change the fan speed as per your preference.
- 4 Ionizer Function
The ionizer can enhance the ability to keep the air fresh
- 5 Filter Reset
The filter reset icon will start **to blink** when it is the time to replace the filter. Remove the lid from the bottom of the unit. Hold the lid and rotate it anticlockwise as shown in the image below. Replace the filter and close the lid. After you have changed the filter, touch and hold the icon to reset filter changing indicator.



Air Quality Indication



Air quality light indicators are placed at the bottom of the unit. Green, yellow and red indicator lights determines the air quality. Below mentioned image shows the position of the light indicators.



Below mentioned is the PM2.5 indication

PM 2.5 Range	Air Quality	Light Indication
0-75	Good	Green
76-150	Fair	Yellow
>150	Poor	Red

Warm reminder:

- When enter sleep mode, the light on control panel will dim



Maintenance

Please read the below mentioned information carefully before cleaning the unit:

- Air purifier should be cleaned regularly. Please unplug the unit before cleaning or replacing filters.
- Use clean soft cloth to clean the surface of the unit. Never use alcohol, gasoline and benzene for cleaning.
- Filters should be cleaned with a soft cloth. Remove the filters after rotating the bottom lid anti-clockwise. Clean the filter with soft cloth (never wash the filter) and re-install. Close the lid by rotating it clockwise.

Safety Precautions

- Place the unit on a flat and firm area.
- Please keep the unit away from water to avoid short-circuit or current.
- Keep the unit away from oil or gas.
- This product is for indoor use only. Do not keep it under direct rain or sunlight.
- Don't block air intake and air outlet to prevent unit from overheating.
- Please operate the unit at the voltage specified on the label.
- Do not try to modify or alter the product on your own.
- Unplug the unit when it is not in use.
- Unplug the unit while cleaning it.
- If cord or plug is broken; turn off the unit immediately.

MEX
Purifina
P201

PEN K INTER TRADING CO., LTD.

HEAD OFFICE : 1000/63-64 PB TOWER. 16th Floor. Sukhumvit 71 Road, North Klongtan,
Wattana, Bangkok 10110 TEL. 02-493-6565 FAX : 02-391-1141

SERVICE CENTER : 63/3 Moo 6 Soi Suksawat 76, Bangchak, Phra Pradaeng, Samut Prakan 10130
TEL. 02-493-6565 FAX : 02-464-1600 E-mail : servicecenter@penk.co.th

www.mexappliance.com